


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		FLUORESCENT (Convex Diffuser Type)	

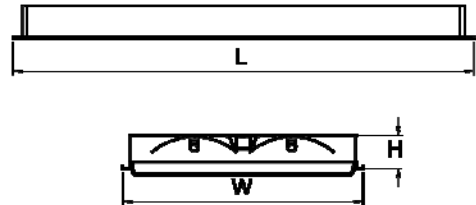

HOUSING			WIRING CABLE			
<p>MADE FROM HIGH GRADE COLD ROLLED STEEL SHEET.</p> <p>SIX-STAGES ZINC-PHOSPHATE PRE-TREATMENT FOR RUST RESISTANT , FINISHED WITH WHITE POLTESTER POWDER BY ELECTROSTATIC METHOD TWO STAGES AND BAKED ENAMEL .</p> <p>THICKNESS <input type="checkbox"/> 0.6 mm , <input type="checkbox"/> 0.8 mm</p>			<p>THW 1x1.0 SQ.MM. 70 °C</p> <p>WIRING CABLE (STANDARD)</p>			
DIFFUSER			LOUVER			
<p>MADE FROM <input type="checkbox"/> PRISMATIC <input type="checkbox"/> ORANGE-PEEL</p> <p><input type="checkbox"/> OPAL <input type="checkbox"/> TRANSPARENT</p>			NONE			
REFLECTOR			LAMP AND HOLDER			
<p>MADE FROM 99.85% PURITY ANODIZED ALUMINIUM WITH MIRROR FINISHED</p> <p><input type="checkbox"/> 87% AND <input type="checkbox"/> 95% TOTAL REFLECTANCE</p>			G13 ROTARY LOCK TYPE LAMP HOLDER			
STANDARD			INSTALLATION			
<p>TIS.902 ๓๕๓2 (2) - 2557 WITH CLASS I AND F MARK</p> <p>TIS.1955-2551</p>			GYPSUM RECESSED MOUNTED			
MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLP10G-220	2x9W	LED TUBE	272	675	110	CUTOUT 265x565mm.