

Categories LED Product
Product Downlight LED




Feature

Equipped with non-flicking driver and high lumen COB led Chip
 Option for 1-10V or Dali Dimming and color changing driver.
 Housing color available in White / Grey / Black



Body and trim color


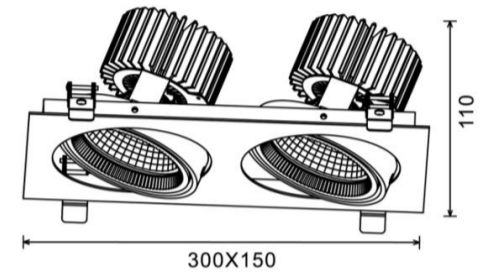


Specification

Housing Made from Die-cast Aluminium.
Housing color With powder color coating in White.
Reflector High grade anodized aluminium.
Installation Recessed Mounted
Standard TIS.1955-2551

Electrical and Lamp Characteristic

Lamp type LED
Power 2x28W
Input Voltage 220-240Vac
Power Factor >0.9
Luminous Flux 2x2400lm / 2x2500lm
Lumen/Watt 85lm/W / 89lm/W
Color Temp. 3000K / 4000K
CRI >80
Beam Angle 15° / 30° / 40° / 55°
LED Life Time (L70) 50,000 Hrs
Operating Temp. -15 °C - 35 °C
Dimension (mm.) (W)150 x (L)300 x (H)110

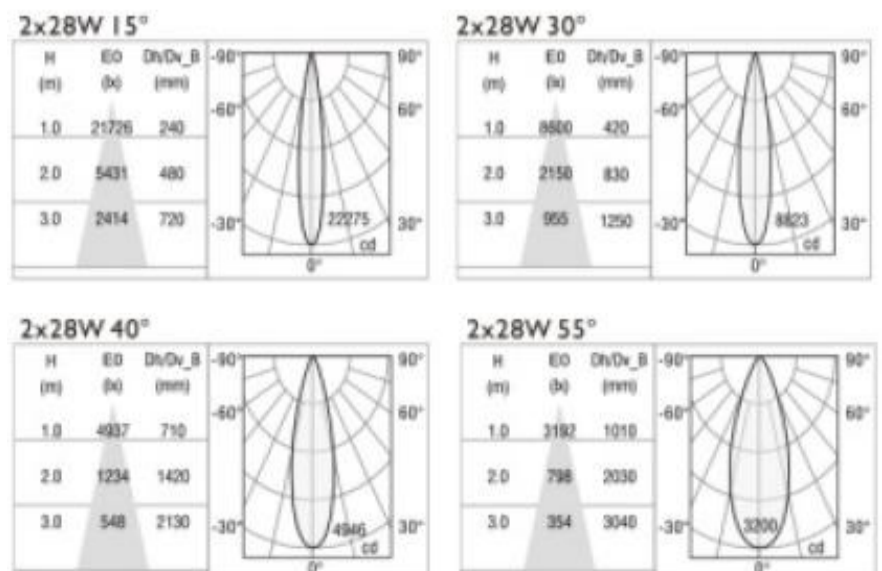

LED and Driver

or equivalent